

Aura-X

Enterprise Room Booking Panel

Delivering a professional workplace image plus significant improvements in room and resource efficiency



Cable Management

Designated cable routes for clean, organized, and versatile installation




PoE+ with Port Cover

Aura-X can be powered with a single Ethernet cable. Ports concealed with a back cover



Touchless Control

Optional non touch control using RFID for instant booking, check-in/out



360° Status Projection

Elegant, soft illumination halo provide clear status indication



Authentication Options

NFC / HID ID, PIN or username & password

Aura-X Features

Booking Time Bar

Quickly view free and booked periods for the current day

Auto Set Up & Cleardown

Bookings can have automatically associated set up and clear down times to ensure workspaces are clean and safe for service users

Future day booking

Click to view and book sessions in the future

Halo Projection

Smooth full-peripheral soft illumination enhances modern interior aesthetics & amplifies room occupancy visibility

Custom Screen Design

Your brand, your graphics, your look and feel

At-a-glance daily bookings

Current/next sessions, duration, meeting title, organizer + attendees info available

Kiosk/Maps + Dual Language

Click to view optional kiosk or office floor map + dual language switching



Customizable Booking Control Buttons

Instant book, check-in/out, extend buttons. Info button for room information and equipment fault reporting

Authentication

Multi frequency RFID reader Available (NFC / HID badges)

Multiple Mounting Options


- VESA 75 mm x 75 mm posts
- Flush, glass, wall, window frame

Clean & Secure Installation

- Built-in cable management
- Power-over-Ethernet (PoE+)
- Tamper-proof port covering

Expansion Port

- Supports Wiegand for access control / RS485 / GPIO

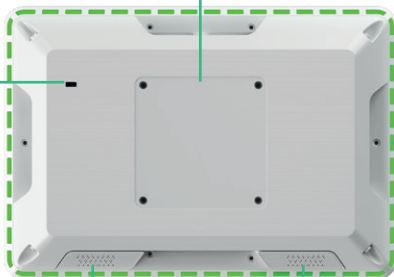


Kensington Lock

- Anti-theft

2 W Speaker

- Paired with microphone and / or webcam for 2-way communication

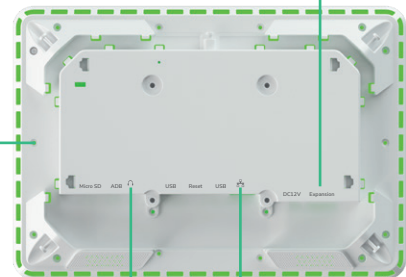

Audio Jack

- External speaker system for announcements

PoE+

- Single-wire installation

Mounting Options



Glass



Wall

Technical Specifications

Display

- 10.1" LCD panel
- 10 points capacitive multi-touch
- 350 nits maximum brightness
- 1280 x 800 panel resolution
- Viewing angle (H / V): 80 / 80
- LED surround status lights with halo projection

Internal Player

- Processor: Cortex-A53 Octa-core
- System memory: 2.0 GB
- Flash memory: 16 GB eMMC built-in

Connectivity

- Wi-Fi: 802.11 a/b/g/n/ac (supports 2.4 GHz and 5 GHz)
- Micro USB for ADB
- Ethernet RJ45: 1000BASE-T, 10/100/1000 Mbps LAN
- USB 2.0 x 2
- Built-in 2 W stereo speaker x 1
- 3.5 mm analog stereo audio out
- Optional 3G / 4G mobile module via USB
- Micro SD card slot, memory expandable to 16 GB / 32 GB / 64 GB (card replaces internal storage)
- Expansion port (supports Wiegand for access control / RS485 / GPIO)
- Optical scanner (8 MP auto focus camera) x 1
- Echo-cancellation microphone x 1

RFID Specifications

- Aura-X-A: 13.56 Mhz
- Aura-X-H: 13.56 Mhz & 125 Khz

Room Management Software

- ResourceXpress room screen licence required

Advanced Features

- ResourceXpress remote device management
- Device health/connectivity monitoring
- Central management of location based settings
- MAC Address validation security
- Touchless interactive operation
- Equipment fault reporting

Supplied Accessories

- HW QSG
- Built-in VESA compatible 75 mm x 75 mm posts
- Back cover screws x 2 pcs
- Flush mount back cover
- Glass mount sticker x 1
- Glass mount cover sheet x 1
- Mounting guide sheet

Optional Accessories

- Power adapter
- Expansion port connector
- Premium Wall Mount

Power Requirement

- Input: 100 - 200 V, 50 - 60 Hz
- Output: 12 V, 2 A
- UL / CB certified power supplies
- Interchangeable connector system includes US plug (optional for EU, UK, and AUS plugs)
- IEEE 802.3 at Power-over-Ethernet (PoE+)

Environmental

- Operating temperature: 0 to 50 °C
- Humidity: 10 to 85 % @ 40 °C non-condensing

Dimensions for Product & Package

- System Dimension: 261 mm x 181 mm x 29 mm (10.28" x 7.12" x 1.14")
- System Weight: TBC
- Individual package size: 320 mm x 90 mm x 255 mm (12.6" x 0.35" x 10.0")
- Outer carton size: 480 mm x 280 mm x 350 mm (18.9" x 11.0" x 13.8")
- Units per outer carton: 5 pcs

Certifications

- CE / FCC

Warranty

- 1-year limited parts & labor (optional three years advance replacement available with ResourceXpress Warranty Plus)



USA
ResourceXpress Inc, 709 Silver Palm Avenue (unit i), Melbourne, FL 32901
Tel: +1-201 256 1601
Email: ussales@qedas.com

UK
QED ResourceXpress, 22 Bridgwater Court, Weston-super-Mare, BS24 9AY
Tel: +44 (0)1934 836960
Email: sales@qedas.com